

scala rider[®]

Audio & Microphone Kit for Half-Helmets



For **scala rider Solo™**, **FM™**,
TeamSet™, **TeamSet™ PRO**,
Q2™ and **Q2™ PRO**
Bluetooth® Communication Systems



Installation Instructions




Thank you for purchasing this **scala rider** accessory. With this specially-designed Audio & Microphone Kit, you can now enjoy the benefits of your **scala rider** communication system when wearing your half-helmet.

This User Guide will help you attach the Audio & Microphone Kit onto your half-helmet and allow you to enjoy its MP3 player option.

CONTENTS OF RETAIL BOX

Audio Kit with boom microphone

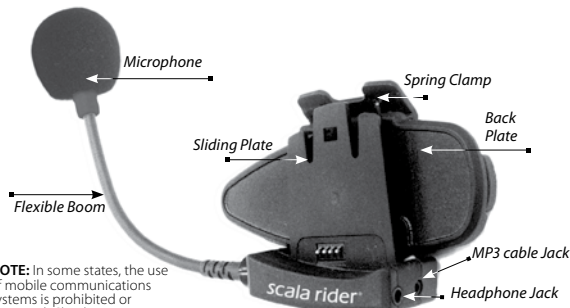

NOTE: In some states, the use of mobile communications systems is prohibited or restricted. Check your state and local laws and regulations before using the product.

Single speaker set (detachable)	
Dual speaker set (detachable)	
Ear Curtains	
Speaker pads	
MP3 Cable	
Microphone Sponge	
User Guide	

Please note that the headset is not included

ATTACHING THE CLAMP ON THE HELMET

The Audio Kit must be attached to the straps on the left side of the half-helmet. Attach the clamp so that on either side of the clamping mechanism both straps are grasped by the front and back of the clamp. Once attached, the headset unit can be mounted or released from the Audio Kit at any time.

1. In one hand, hold open the spring clamp at the top. Using the other hand, hold the left strap of the half-helmet. Insert the long end of the back plate to hold the front of the strap and the short end of the back plate to hold the back of the strap. Release the clamp.
2. Insert the left ear curtain between the lining and the outer shell of the half-helmet, making sure that the Velcro backing is facing outwards.
3. Where possible, align the half-helmet straps with the Velcro on the outer side of the ear curtains and insert the strap under the elastic band to ensure maximum comfort.



4. Insert the right ear curtain in similar fashion and place half-helmet on head.
5. Adjust the clamp's location and bend the microphone boom so that the microphone is located opposite the center of your mouth. Check to make sure the yellow symbol is facing inwards towards the mouth.



MICROPHONE AND SPEAKERS POSITIONING

Your Audio Kit contains 2 sets of ultra-slim detachable speakers; a single speaker and dual speakers.



NOTE: Using two speakers inside the half-helmet may be prohibited in certain jurisdictions

Choose the dual or single speaker set and connect it via the headphone jack on the back of the Audio Kit. The microphone must be positioned in front of the center of the mouth.

NOTE: For headsets with built-in FM Radio functionality, the dual speakers are required for FM Radio reception.

ATTACHING THE SINGLE SPEAKER


Fasten the left speaker firmly to the Velcro on the inside of the left ear curtain so that it is positioned directly opposite your left ear.

When wearing your half-helmet, make sure to close and tighten the helmet straps firmly to ensure maximum audio quality and prevent the Audio Kit from moving while in use.



ATTACHING THE DUAL SPEAKERS


The Dual Speakers have a short speaker cord for the left ear [A] and a long speaker cord [B] for the right ear.



Fasten the left speaker firmly to the Velcro on the inside of the left ear curtain so that it is positioned directly opposite your left ear.

For high quality FM radio reception, we recommend the right speaker cord [B] is fed under the inner lining of the helmet to the right side of the helmet. For helmets with no internal lining, special stickers are provided to stick the long cord to the top of the helmet.

Then fasten the right speaker firmly to the Velcro on the inside of the ear curtain so that it is positioned opposite your right ear.

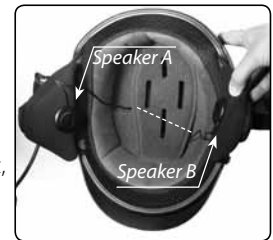

When wearing your half-helmet, make sure to close and tighten the helmet straps firmly to ensure maximum audio quality and prevent the Audio Kit from moving while in use.

ATTACHABLE SPEAKER PADS (OPTIONAL)

The Attachable Speaker Pads allow you to position the speakers closer to your ears for a better audio experience.


1. Attach the Speaker Pads to the Velcro on the inside of the Ear Curtain.
2. Fasten the speakers firmly to the Speaker Pads.



CONNECTING AN MP3 PLAYER

Your **scala rider** communication system can be connected to an MP3 player by plugging it to the Audio Kit's MP3 cable jack via the MP3 cable.

1. Connect the MP3 cable to your MP3 player's headphone jack and the other side to the audio kit's MP3 cable jack. Make sure that the cable plug clicks into place.
2. In order to use your MP3 player, turn on the headset and leave it in Standby mode, flashing slowly in Blue.



NOTES:

1. Operate the MP3 Player by using its buttons (FF/REW/PLAY/PAUSE).
2. Volume can only be adjusted through the MP3 Player.
3. Any other audio connection will automatically mute the MP3 Player.
4. The audio signal will return only when headset is once again in Standby mode.

SUPPORT

For additional information please visit our website at

www.cardosystems.com

FAQ: **www.cardosystems.com/support/faq**

or contact us at:

support@cardosystems.com

Phone:

USA and Canada: **1-800-488-0363**

International: **+4989 450 36819**